



YANKEE HILL MACHINE Co., Inc.
WWW.YHM.NET

PHONE: 1-877-892-6533
FAX: 1-413-586-1326



Installation Instructions For: Triple Mount

Part Number(s): YHM-639K

ONLY a licensed gunsmith experienced with your model of firearm should install this product. Failure to install this product correctly voids any warranties of the product and removes any liabilities against the manufacturer. Be certain the firearm is unloaded and the muzzle is pointed in a safe direction before starting this removal and installation process.

This package includes two sets of bushings. One has an inside diameter of .720" which will fit the majority of barrels. The second one has an inside diameter of .750" which will fit the remaining barrels. To select the correct bushing:

1. -Take the .720" bushing from the package
-Set one piece over the barrel just in front of your front sight
-Check to see if the inside of the bushing is fully contacting the barrel (see illustration)

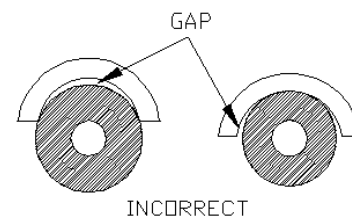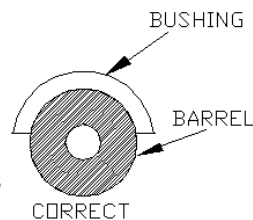


-If there is a gap in the middle or on the sides of the bushing you have the wrong bushing. (see illustration)

2. Slide the mount in place as seen in figure (A)

Figure A



3. Install the bushings into the triple mount with the split in the same position as the slot in the triple mount as shown in figure (B). A Screw driver may be needed to spread the mount enough to insert the bushings.

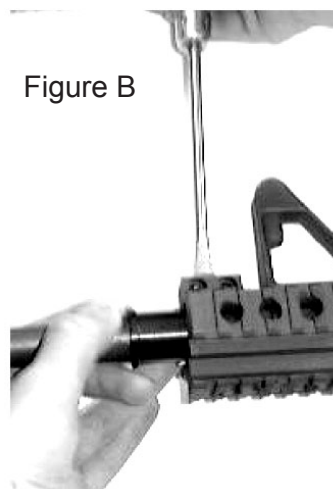

4. Install the screws and tighten firmly making sure not to over tighten.

CHECK OUT
OUR OTHER PRODUCTS AT WWW.YHM.NET